



UFO

LED HIGH BAY

SkyLight UFO High Bay is a reliable solution in designs for its advantages from several aspects. First, it is with high lumen efficiency which is suitable for warehouse application. Second, the low UGR make the light more comfortable in commercial lighting purpose as well. Last but not least, it is easy and safety to operate in installation.

KeyFeatures



150LM/W



50,000hrs



IP66



DIMMABLE




LUMILEDS



LOWTEMP

SkyLight

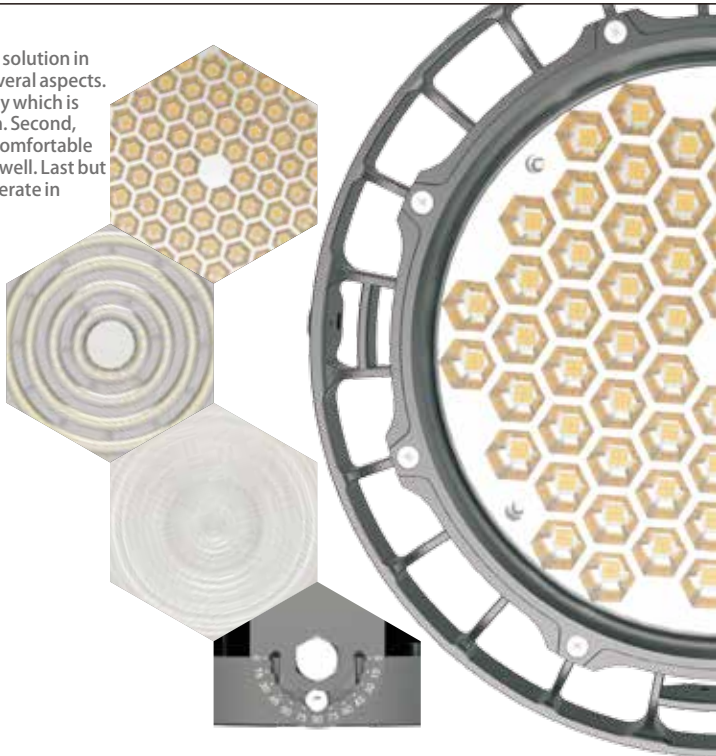

Applications

- › Warehouses
- › Manufacturing
- › Education Facilities
- › Exhibition halls
- › Sports Arenas
- › Industrial Plants
- › Cargo Centers
- › Cold stores
- › Production Lines
- › Aviation Hangars
- › Tunnels
- › Concert Halls
- › Shopping Malls
- › Food Production


Accessory

Bracket, PC Reflector, Aluminum Reflector, M20 Transition Head are available

Mounting Options



HOOK/CHAIN MOUNTING




POLE MOUNTING



SURFACE MOUNTING


SkyLight

LOW UGR

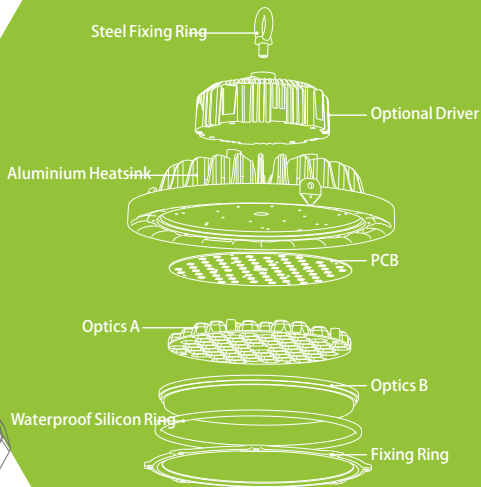


SkyLight

HIGH LUMEN

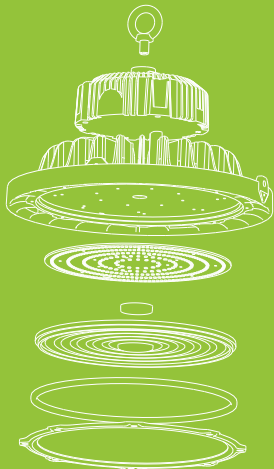

SkyLight

WIDE BEAM ANGLE

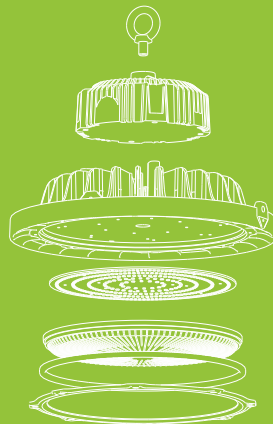


CEN series


Technical Data

WATTAGES	100W,150W,200W,240W
INPUTVOLTAGE	AC100-277V
LEDTYPE	3030
LEDDRIVER	ZHIHE
LUMINOUS EFFICIENCY	130-150LM/W
COLORTEMPERATURE(CT)	3000K, 4000K,5000K,5700K
CRI	Ra>70
BEAMANGLES	60°,90°,120°,140°
SURGE PROTECTION	LN-PG:10KV L-N:5KV
WORKINGTEMPERATURE	-20~+50 °C
STORAGE TEMPERATURE	-30~+50 °C
HOUSING COLOUR	Black


SkyLight



UFO100W



UFO150W






UFO200W/240W

HBG series

Technical Data

WATTAGES	60W,80W,100W,120W,150W,180W,200W,240W
INPUTVOLTAGE	AC100-277V
LEDTYPE	3030
LEDDRIVER	MEAN WELL, HBG SERIES
LUMINOUS EFFICIENCY	130-150LM/W
COLOR TEMPERATURE (K)	3000K, 4000K, 5000K, 5700K
CRI	Ra>70
BEAM ANGLES	60°, 90°, 120°, 140°
SURGE PROTECTION	LN-PG:4KV L-N:2KV
WORKING TEMPERATURE	-20~+50 °C
STORAGE TEMPERATURE	-30~+50 °C
HOUSING COLOUR	Black

SkyLight




ELG series


Technical Data

WATTAGES	80W,100W,120W,150W,180W,200W,240W
INPUTVOLTAGE	AC100-277V
LEDTYPE	3030
LEDDRIVER	MEAN WELL, ELG SERIES
LUMINOUS EFFICIENCY	130-150LM/W
COLOR TEMPERATURE (K)	3000K, 4000K, 5000K, 5700K
CRI	Ra>70
BEAM ANGLES	60°, 90°, 120°, 140°
SURGE PROTECTION	LN-PG:4KV L-N:2KV
WORKING TEMPERATURE	-20~+50 °C
STORAGE TEMPERATURE	-30~+50 °C
HOUSING COLOUR	Black


SkyLight




UFO80W/100W




UFO150W



UFO200W/240W



UFO80W-150W



UFO200W/240W

PHI series

WATTAGES

80W,110W,150W,180W

INPUTVOLTAGE

AC180-240V

LEDTYPE

3030

LEDDRIVER

PHILIPS

LUMINOUS EFFICIENCY

150LM/W

COLOR TEMPERATURE (CT)

3000K, 4000K, 5000K, 5700K

CRI

Ra>70

BEAM ANGLES

60°, 90°, 120°, 140°

SURGE PROTECTION

LN-PG:6KV L-N:4KV

WORKING TEMPERATURE

-20~+60 °C

STORAGE TEMPERATURE


-30~+60 °C

HOUSING COLOUR


Black

Technical Data


SkyLight



UFO80W/110W



UFO150W




UFO180W

CPG series


WATTAGES	100W,150W,200W,240W
INPUTVOLTAGE	AC100-277V
LEDTYPE	3030
LEDDRIVER	CENGO, CPG SERIES
LUMINOUS EFFICIENCY	110LM/W
COLOR TEMPERATURE	3000K, 4000K, 5000K, 5700K
CRI	Ra>70
BEAM ANGLES	60°, 90°, 120°, 140°
SURGE PROTECTION	LN-PG:4KV L-N:4KV
WORKING TEMPERATURE	-20~+50 °C
STORAGE TEMPERATURE	-30~+50 °C
HOUSING COLOUR	Black

Technical Data


SkyLight



UFO100W



UFO150W



UFO200W/240W

SkyLight



LUMILEDS

Partner



PHILIPS



Function Options

Dali
Zigbee
5.8G Motion
Sensor

Shipping Information

CARTON	60-100W	120-150W	180-240W
BOXED WEIGHT	3.43KG	4.44KG	5.58KG
BOXED SIZE	305x305x170(mm)	345x345x185(mm)	365x365x190(mm)
20 GP CONTAINER	1,080pcs	990pcs	990pcs
40 GP CONTAINER	2,592pcs	1,980pcs	1,980pcs
40 HQ CONTAINER	3,024pcs	2,340pcs	2,340pcs
45 HQ CONTAINER	3,276pcs	2,808pcs	2,808pcs
PALLET SIZE	100x100x15cm	110x110x15cm	110x110x15cm



SkyLight UFO





SkyLight UFO



Room 2705AB SEG. Plaza Hua Qiang Road, Futian
District 518000 Shenzhen, China



+86 0755 8271 3147



info@linksunrise.com



www.ledskylight.com

